



 Bluetooth®


Fujikura 41S Fusion Splicer

The Fujikura 41S is a fully ruggedized, two camera, active cladding alignment fusion splicer. Core sensing loss estimation technology provides the most accurate assessment of splice loss available in any active cladding alignment splicer in the world. Enabled by Warm Splice Imaging (WSI), the 41S can determine the accuracy of core alignment by evaluation of the splice during the heating process. This technology delivers splice loss estimates with a greater level of accuracy as those based on only cladding alignment. State-of-the-art cleaver management via Bluetooth® connection with the CT50 Cleaver tracks usage and enables automated blade rotation as needed. The dual-camera, active V-groove alignment system provides consistent splicing performance in the most challenging conditions. A 6-second splice time and 25-second shrink time offers unmatched speed and productivity, while an easy-to-use touchscreen monitor provides simple and intuitive menu navigation. Interchangeable sheath clamps or fiber holders provide versatility for user preference, and compatibility with fusion installable connectors. The extended-life battery is rated for up to 200 splice and heat cycles. Long-life electrodes, lasting 5,000 splices, help minimize downtime for replacement and stabilization. The large 5" monitor provides a crystal clear image, even in the brightest sunlight. Software updates are accomplished via the internet allowing users to quickly update their software as new splice programs become available.

Backed by the best service team in the industry, the Fujikura 41S is the ideal splicer to use when portability, ruggedness, and reliability are needed for your splicing application.



Workstation in Transit Case

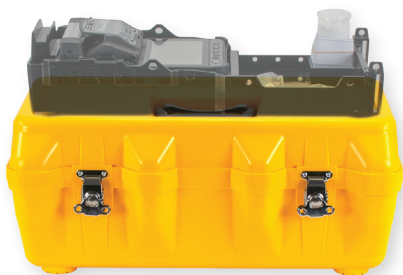

Workstation on Transit Case

Features

- Warm Splice Imaging (WSI) loss estimation technology
- Bluetooth enabled cleaver management
- Two camera, active cladding alignment
- 5" touchscreen monitor
- Interchangeable sheath clamps and fiber holders
- Fully ruggedized for shock, moisture and dust resistance
- Extended-life electrodes, 5,000 splices, exchangeable without tools
- Long-life battery (200 splices/shrinks per charge)

Ordering Information

DESCRIPTION	AFL NO.
Fujikura 41S Fusion Splicer Includes: Fujikura 41S Fusion Splicer, S31A Sheath clamps (installed), SP-31 Set Plates, ADC-19A AC Adapter, BTR-11A Battery Pack (installed), ACC-09 Power Cord, ELCT2-16B Spare Electrodes (pair), Operation Manual on CD, Quick Reference Guide, SS-03 Single Fiber Stripper and CC-36 Transit Case	S017090
Fujikura 41S Fusion Splicer Kit with CT50 Cleaver Includes: Fujikura 41S Fusion Splicer, CT50 Cleaver, S31A Sheath clamps (installed), SP-31 Set Plates, ADC-19A AC Adapter, BTR-11A Battery Pack (installed), ACC-09 Power Cord, ELCT2-16B Spare Electrodes (pair), Operation Manual on CD, Quick Reference Guide, SS-03 Single Fiber Stripper and CC-36 Transit Case	S017091
One Year Extended Warranty	S012996
Two Year Extended Warranty	S013000

Fujikura 41S Fusion Splicer

Recommended Accessories

DESCRIPTION	AFL NO.
Cleavers	
CT50 Cleaver	S017030
CT08 Cleaver	S017004
Fiber Holders	
FH-70-250 Fiber Holder (pair)	S017111
FH-70-900 Fiber Holder (pair)	S017113
FH-60-LT900 Fiber Holder (pair)	S015181
Batteries	
BTR-11A Battery Pack	S017354
FUSEConnect® Accessories	
FH-FC-20 (900 µm within 2.0 mm sheathing) (each)	S014696
FH-FC-30 (900 µm within 3.0 mm sheathing) (pair)	S014695
FH-FC-900 (900 µm cable) (each)	S014697
CLAMP-FC-2000 (pair)	S014705
CLAMP-FC-3000 (pair)	S014704

DESCRIPTION	AFL NO.
Miscellaneous	
CLAMP-S31A Sheath Clamps	S017100
CLAMP-S31B Sheath Clamps for loose buffer 900 µm	S017101
SP-31 Set Plate (pair)	S017106
ELCT2-16B Electrodes	S017103
ADC-19A AC Adapter	S017104
ACC-09 Power Cord	S014390
CC-36 Transit Case	S017105
USB Cable	S014777
Splicer V-Groove Cleaning Kit	S014397
SS03 Single Fiber Stripper (3 hole)	S017098
SS01 Single Fiber Stripper (1 hole)	S017099

Specifications

PARAMETER	VALUE
Model	41S
Applicable Fibers	Single-mode (G.652 & G.657), Multimode (G.651), DSF (G.653), NZDS (G.655)
Cladding Diameter	125 µm
Coating Diameter	250 µm up to 3 mm
Fiber Cleave Length	5 mm to 16 mm
Typical Average Splice Loss	0.03 dB (SM), 0.01 dB (MM), 0.05 dB (DS) and 0.05 dB (NZDS)
Splicing Time	Typical 6 sec with SM
Arc Calibration Method	Automatic, real-time and by using results of previous splice when in AUTO mode, manual arc calibration function available
Splicing Modes	Total 100 splice modes
Splice Loss Estimate	Determined with cladding or core alignment based on method selected by the user
Storage of Splice Result	10,000 splice results
Fiber Display	5 inch TFT color LCD with X or Y view or both X and Y view simultaneously
Magnification	200X for single-camera view and 132X magnification for dual-camera view
Viewing Method	2 axis CMOS camera
Operating Condition	Altitude: 0 to 5,000 m above sea level, -10° to +50° C, Humidity: 0 to 95% RH, non-dew
Mechanical Proof Test	1.96 N
Tube Heater	30 heating modes
Tube Heating Time	Typical 25 sec with FP-60 (60 mm) sleeve
Protection Sleeve Length	60 mm, 40 mm, micro
Splice/Heat Cycles with Battery	Typical 200 cycles with BTR-11A
Electrode Life	5,000 splices
Power Supply	Auto select from 100 V to 240 V with AC adapter, 14.8 V DC with installed battery
Terminals	USB 2.0
Wind Protection	Maximum wind velocity of 15 m/s. (34 mph)
Dimensions	131 x 201 x 79 (mm)
Weight	1,300 g (2.85 lbs) with battery